



Automated Parking System with Driving License Access

Harmeet Singh*, Shailesh Ranjan, Shivam Dhar, Chetan Anand
Guru Tegh Bahadur Institute of Technology, G-8 Area Rajouri Garden, Delhi, India

Abstract: This paper aims at the prospect of developing a fully automated parking system for two wheelers and cars. This proposed system improvises upon the existing parking system by enhancing its security features and automating the parking process thus eliminating the need for manual intervention. For authentication and owner vehicle identification the parking system has an inbuilt smartcard reader. The user has to insert his/her driving license in it. The smartcard reader fetches the user's registration number and transfers it to database. The user has to re-insert his/her driving license at the time of exit. This eliminates the use of tokens or paper bills. The space management and automation is performed with the help of an ARM microcontroller which controls the mechanical motors to park the vehicle at an appropriate parking location [5].

Keywords: Smartcard, LCD (Liquid Crystal Display), ARM Cortex M3, Rack and pinion.

I. INTRODUCTION

Two get an overview of the proposed system and to understand the advantages of using driving license as a means of access, let us discuss the two things part by part so that we get a clear insight into the working of the system.

A. Smartcard based Driving license:

Smart card is a credit card sized plastic card which is embedded with an electronic chip. Nowadays, the paper based driving licenses have been replaced by smart cards which contains all the details about the owner in a chip embedded within the card. This chip contains memory as well as a processor integrated in it. The processor runs an operating system designed especially for smartcards. The chip can not only store information but also process the data in it. The user data is organised in a well defined file structure. The card data is transacted through a smartcard reader that is attached to a computer. The data inside the chip can be accessed via access control protocols predefined in the operating system. The memory size of the smartcards is typically in the range of 4KB to 150KB. Smartcards are being implemented in many applications today as healthcare, banking, ticketing, shopping etc. The processor of the smartcard could be either an 8-bit or a 32-bit processor. The OS is present in the ROM of the processor. Moreover, they also have cryptographic processors. There is a well defined file structure maintained within it. Thus, a smartcard is just like a mini computer embedded in a chip.

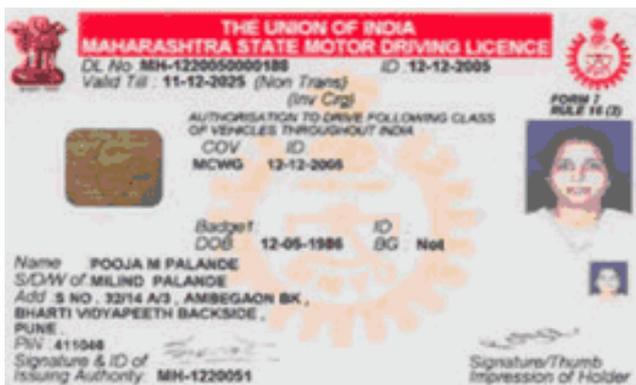


Figure 1: Driving License (Smartcard based)

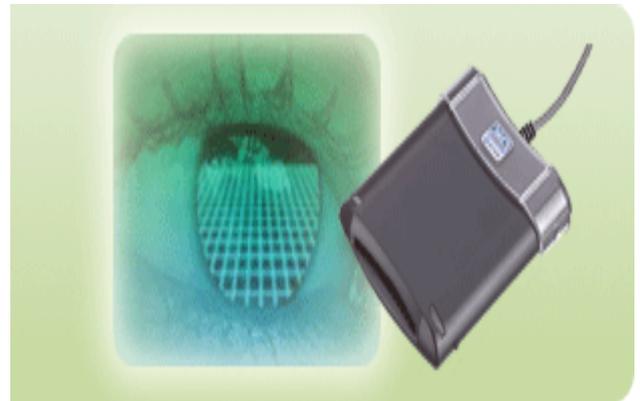


Figure 2: Smartcard Reader

Depending upon the technology used the cards can be sub-divided into three categories which are contact cards, contactless cards and dual interface or hybrid cards. The contact cards consist of contact pads to interact with the smart card reader, the contactless cards have antennae and the dual interface cards have both the features [8].

India is taking a significant initiative for the implementation of smartcards in various fields. All the smartcards used in India must fulfil a set standards laid down by SCOSTA. The acronym 'SCOSTA' stands for Smart Card Operating System for Transport Applications and is the operating system specification for smartcards to be used as vehicle registration cards and drivers' license cards in India.

B. Automated Parking System:

An Automated Parking System is a mechanism designed to minimize the area required for parking vehicles. It resembles a multi-story garage which provides parking facility for vehicles on multiple levels stacked one above the other to optimize the number of parking spaces while reducing land usage. Separate floors are assigned for two wheelers and four wheelers. This system makes use of a mechanical system that transports vehicles to and from parking lots rather than the vehicle owner; so as to eliminate the wastage of space. It is analogous to an automated storage and retrieval system for vehicles.

II. SYSTEM ARCHITECTURE

This parking system is fully automated and easy to access. The user drives the vehicle into a transfer area. The driver and all passengers de-board the vehicle. The driver inserts his/her driving license into the smartcard reader in an automated terminal nearby. The smartcard reader fetches the owner's registration number and then sends appropriate commands to the microcontroller which, thereafter, assigns an empty parking slot depending upon the type of the vehicle (two wheeler/four wheeler). When driver and passengers have left the entry area, the mechanical system lifts the car and transports it to a predetermined parking space in the parking garage. The vehicle is transported to the parking location with the help of a rack and pinion mechanism for linear motion. Since the build-up of the

parking space is cylindrical in shape, linear motion along X-Y axes and rotational motion in X plane is used to place the vehicle in the specified position.

The driver retrieves the vehicle by re-inserting the driving license into the automated smartcard reader terminal. The system calculates the parking charges to be collected according to the duration of parking and the type of vehicle. The driver makes the payment. The parking system then lifts the vehicle from its parking space and transfers it to an exit area using the same rack and pinion mechanism. Also, the retrieved vehicle is oriented in a direction similar to the exit route to do away with the need for the driver to back out.

Thus this fully automated parking system theoretically eliminates the need for parking attendants by using the vehicle owner's driving license as a means of authentication and vehicle identification.



Figure 3: The Proposed Parking System

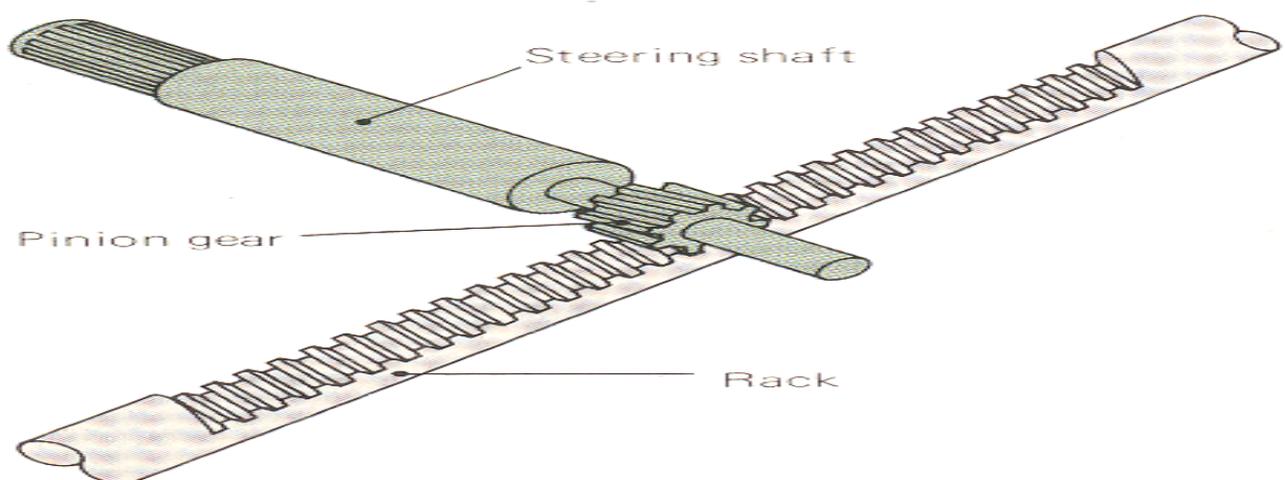


Figure 4: Rack and pinion arrangement

III. SYSTEM WORKING

During the parking process, the driver places his vehicle on a movable platform at the entrance of the parking lot.

He/she then inserts his/her driving license into the smart card reader. The smartcard reader terminal uses file access protocols to fetch the unique registration number stored in the driving license chip and forwards it to ARM Cortex M3 microcontroller implementing the Serial Peripheral Interface

(SPI) mode. The ARM microcontroller compares this with other registration numbers already stored in the memory. In case of mismatch the microcontroller decides that there is a new vehicle which needs to be parked and it initiates the parking process otherwise, it concludes that the vehicle which has already been parked needs to be retrieved and starts the retrieving process[1][3].

During the parking process the microcontroller first stores the unique registration number in the memory, determines the nearest empty slot[6] and instructs the user to press start button. After the start button is pressed, the microcontroller directs the motor driver circuit to act in accordance with the commands given. The LCD screen attached with the microcontroller displays "Parking in Progress". The motor driver circuit operates the motors according to the commands and the vehicle is parked at the nearest vacant location assigned by cortex M3. After the vehicle is parked the LCD displays the message "Parking Successful". The microcontroller stores the exact location of the parking slot corresponding to the specific registration number in the memory. During the retrieval procedure the microcontroller compares the registration number with those already existing in its memory. In case, the exact match is found the microcontroller fetches the location of the vehicle corresponding to the specific registration number from its memory. Accordingly it gives command to the motor driver circuit to retrieve the vehicle and the LCD displays "Retrieval in progress". The LCD will display "Successful retrieval" after the vehicle is retrieved from its parking location and brought back to the starting platform. The microcontroller then deletes that particular registration number from its database and waits for the next input from the smartcard reader terminal. The ARM Cortex M3 is programmed using Kiel uVision IDE[7].

IV. ADVANTAGES

- i. Eliminates the need for additional parking tokens.
- ii. As every driving license has a unique registration number so the system is free from unauthorized access.
- iii. A significant advantage of this system is that it discourages people from driving without a driving license.
- iv. Parking area is fully utilised since no extra space allowance need be made for driving the car into the parking space or for the opening of car doors.
- v. No driving lanes or ramps are needed to drive the vehicle to/from the entrance/exit to a parking space.
- vi. The parked vehicles and their contents are more secure since there is no manual access to parked vehicles.
- vii. Minor damages such as scrapes and dents are eradicated.
- viii. Driving around in search of a parking space is not required, hence, saving time and fuel.
- ix. Reduces cost of manual labour and paper tokens.

V. LIMITATIONS

- i. The installation period and the initial cost of setup is high.
- ii. Due to single entry and exit point there will be a deadlock situation if several vehicles arrive simultaneously.

VI. FUTURE SCOPE

Multiple routes for entry and exit points can be constructed to facilitate free flow of vehicles.

VII. CONCLUSION

We, hereby, presented a detailed description of our Automated Parking System. It helps to alleviate the shortcomings of current parking systems. The use of driving license for authentication adds to the system's security. The biggest challenge that one faces in a system are specifically those manual processes which directly affect its revenue. In this system, we identified those processes to be issuance of parking slips to the customers and calculating the amount of time for which the vehicle has been parked because this is such a business where every minute is accountable and is being charged from the customers. Hence there has been a conscious attempt in the application to completely remove this hassle in the daily operations being done in this system. And even though the initial cost of setup is high, it is worth implementing as it provides an efficient way of optimizing space, performance and security.

VIII. REFERENCES

- [1] The Definitive Guide to the ARM Cortex-M3 (Joseph Yiu, Newnes, 2009)
- [2] S.C.Hanche, Pooja Munot, Pranali Bagal, Kirti Sonawane, Pooja Pise, "Automated Vehicle Parking System using RFID", ITSI-TEEE, ISSN(PRINT) :2320-8945, Volume-1, Issue-2, 2013 .
- [3] Sheng-Fuu Lin, Yung-Yao Chen, "A vision-based parking lot management system", 2006 IEEE Conference on Systems, Man, and Cybernetics. Peter. C, pp. 2897- 902, Oct. 2006.
- [4] Amin Kianpisheh, Norlia Mustaffa, Pakapan Limtrairut, Pantea Keikhosrokiani, "Smart Parking System(SPS) Architecture using Ultrasonic Detector", *International Journal of Software Engineering and Its Applications*, Vol.6 ,No.3, July, 2012.
- [5] M.M.Israfil Shahin Seddiqe, Avizit Basak "Design of an Automated Car Parking System by using Microcontroller", published in *Global Journal of Research in Engineering(F) Volume XIII Issue XVI Version I, 2013*.
- [6] Ho Gi Jung, Chi Gun Choi, Pal Joo Yoon, Jaihie Kim "Semi-automatic Parking System Recognizing Parking Lot Markings".
- [7] Harsh Kotak, Prithvish Mamtora, Dhruv Mehta, Grishma Vithalani "Automated Car Parking System with NFC access".
- [8] www.smartcardalliance.org