



REMOTE CONTROL OF A MOTOR VEHICLE AND THEFT PREVENTION

Suaysom I. and Adsavakulchai S.*

School of Engineering,
University of the Thai Chamber of Commerce,
Bangkok, Thailand
suwannee_ads@utcc.ac.th

Abstract: This paper presents a remote control of a motor vehicle and theft prevention uses a wireless network to receive the information and transmits it to the motor vehicle. A user uses a communication device, such as a Bluetooth (ESD200) in mobile phone, to send instructions to the wireless network. The research idea focuses on the users into authorized ones by simulation. Firstly, to develop the embedded system into a security system is to identify the authorized drivers in response to the real time. A microcontroller (ET-BASE PIC18F8722 (ICD2)) is installed in the car for transmitter Bluetooth in mobile phone using Python, Paraniwin and MPLab program to interface that is complete and showing on the mobile phone screen that is available. Finally, the experimental results verify that the proposed method is valid and useful against the vehicle thefts problem with a success rate of 100% within surrounding distance 12 meters with the door opening intrusion message (SMS) alert via mobile phone within 5 seconds.

Keywords: remote control system, Mobile Phone, embedded system, SMS, Bluetooth

I. INTRODUCTION

Conventionally, a remote control of a motor vehicle and theft prevention is operated with a key fob. A user depresses a button on a transmitter to the motor vehicle to open the doors. Some remotely operable devices provide for disabling the motor vehicle if the vehicle is stolen. If the vehicle is disabled at an inopportune time, such as when the vehicle is being driven on a crowded street, the vehicle could be damaged or the safety of others could be jeopardized. An improved remote control system with an improved theft prevention system which overcomes the above mentioned problems is highly desirable. Thus, for some users, the effective range of such a remote starter is insufficient. Theoretically, the range of such an FM (frequency modulated) signal could be in excess of one thousand (1000) feet. This is because of the obstructions such as concrete and metal walls reduce the effective range of the transmitter. Since motor vehicles are often parked with many other motor vehicles in parking lots, the interference from these other automobiles further affects the range. Further, due to the proximity of the transmitter to the electrical systems of the automobile, there is an increased risk for interference.

Currently intrusion detection technology attempts to gain illegal entry into vehicles can cause significant damage and has failed to evolve at the rate of other car technologies. Due to the lack of user configurable alarms cannot be optimised for a specific vehicle, and localized deterrent and alert capabilities to within an audible distance of the vehicle. To overcome these problems, attempts have been made to use wireless networks to remote control of a motor vehicle and theft prevention. A signal to start the automobile is received by the paging receiver. The paging receiver then activates a wireless transmitter within the automobile. The wireless transmitter sends a signal to the remote control. While such a system does increase the range of the remote control system, the additional transmitter within the motor vehicle increases the complexity of an aftermarket installation of the system. The paging

display changes to serve as an extra screen for the application that is currently in use on the personal computer.

Thus, the main objective of this study is to develop a remote control system for a motor vehicle using microcontroller embedded system under mobile application control.

II. METHODOLOGY

The research framework of this study is shown in Figure 1. The steps of this study are as following:

1. To design block diagram of the microcontroller (ET-BASE PIC18F8722 (ICD2)) that is installed in the car for transmitter Bluetooth via mobile phone as shown in Figure 2.
2. To develop flowchart for deploying to an embedded system as shown in Figure 3.

To implement alarm system on real-time under real situation as shown in Figure 4.

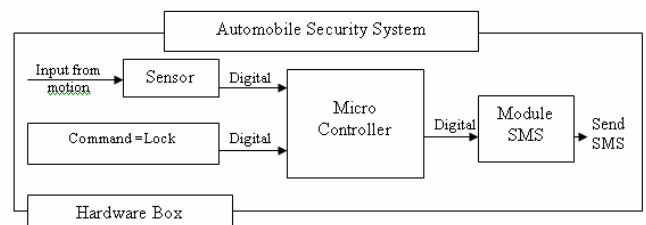


Figure 1: Research framework of this study

From Figure 1, to develop automobile security system that is the remote control system for a motor vehicle is to simulate the input from motion. The automobile security system is to design the block diagram of the microcontroller (ET-BASE PIC18F8722 (ICD2)) that is installed in the car for transmitter Bluetooth in mobile phone as shown in Figure 2. To develop flowchart design block diagram of the microcontroller (ET-BASE PIC18F8722 (ICD2)) that is installed in the car for

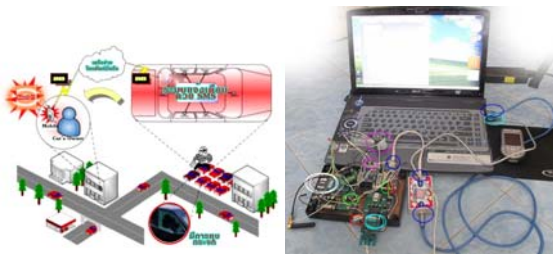


Figure 5: The overview of the automobile security system

IV. CONCLUSION

From Figure 4, to demonstrate an automobile security system connecting in the whole system that the microcontroller (ET-BASE PIC18F8722 (ICD2)) embedded in a hardware box connecting with notebook, mobile phone and software for rapid system prototyping and testing. The black box contained several parts are shown in Figure 6.

The best part of this project is the possibilities. Not only to remote open the car from afar but also to use the other features of the mobile phone to automate the remote alert by SMS to handling the vehicle thefts problem using door the intrusion message alert via mobile phone. It can be concluded that the experimental results verify that the proposed method is valid and useful against the vehicle thefts problem with a success rate of 100% within surrounding distance 12 meters. On-going research is to the software that will be working on improving the interfaces to these applications with a particular focus on improving mobile phone usability. Other work will be directed at improving the remote control capabilities for appliances, especially for collections of appliances, so the user can, for example, control an entire automobile system at the same time providing increased functionality

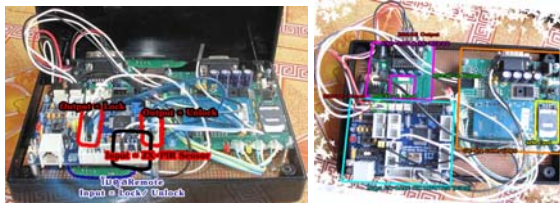


Figure 6: shows the general operation of the device

V. REFERENCES

From Figure 6, there are three modules, 1. the module of the remote control for output is to lock or unlock the door using ZX-PIR motion sensor as an input into the system 2. the module of ET-BASE PIC18F8722 (ICD2) with input from RS232 and output to ESD-200 & ZX-BT232 3. the module for GR-64 GSM/GPRS to send SMS to car owner.

- [1] Brouwer-Janse, M.D., Bennett, R.W., Endo, T., van Nes, F.L., Strubbe, H.J., Gentner, D.R., 1992. Interfaces for consumer products: 'how to camouflage the computer?'. CHI'1992: Human Factors in Computing Systems, Monterey, CA, May 3-7, pp. 287-290
- [2] Edwards, W.K., et al., 2002. Using speakeasy for ad hoc peer-to-peer collaboration. ACM Conference on Computer Supported Cooperative Work: CSCW'02, New Orleans, LA, pp. 256-265
- [3] Hodes, T.D., Katz, R.H., Servan-Schreiber, E., Rowe, L., 1997. Composable ad-hoc mobile services for universal interaction. Proceedings of the Third Annual ACM/IEEE International Conference on Mobile Computing and Networking (ACM Mobicom'97), Budapest Hungary, September 26-30, pp. 1-12
- [4] Myers, B.A., 2001. Using hand-held devices and PCs together. Communications of the ACM 4(11), 34-41. <http://www.cs.cmu.edu/~pebbles/papers/pebblescacm.pdf>
- [5] Myers, B.A., et al., 2002a. Flexi-modal and multi-machine user interfaces. IEEE Fourth International Conference on Multimodal Interfaces, Pittsburgh, PA, October 14-16, pp. 343-348, <http://www.cs.cmu.edu/~cpof/papers/cpoficmi02.pdf>
- [6] Nichols, J., Myers, B.A., 2003. Studying the use of handhelds to control smart appliances. International Workshop on Smart Appliances and Wearable Computers, Providence, Rhode Island, May 19-22, pp. 274-279, <http://www.cs.cmu.edu/~effreyn/papers/iwsawc2003puc.pdf>
- [7] Nichols, J., Myers, B.A., Higgins, M., Hughes, J., Harris, T.K., Rosenfeld, R., Pignol, M., 2002. Generating remote control interfaces for complex appliances. CHI Letters: ACM Symposium on User Interface Software and Technology, UIST'02, Paris, France, October 2002, pp. 161-170, <http://www.cs.cmu.edu/~pebbles/papers/PebblesPUCuist.pdf>
- [8] Nichols, J., Myers, B.A., Litwack, K., 2004. Improving Automatic Interface Generation with Smart Templates, IUI'04, Madeira, Funchal, Portugal, January 13-16, 286-288, <http://www.cs.cmu.edu/~jeffreyn/papers/templates IUI.pdf>

B. Software testing

Software testing by using MPLAB embedded program to ET-BASE PIC18F8722 (ICD2) for interprets the program to machine language that microcontrollers can understand and work. The system is open the car via the mobile phone from virtually anywhere. After looking into the system, the fact that the system is exactly like using the remote as shown the main program in the mobile phone in Figure 7.



Figure 7: shows the mobile application implementation

From Figure 7, in this study is to develop an automatic user interface generators that takes a high-level, abstract specification of the functions of an appliance, and create a high-quality user interface for it. To have created generators that will automatically produce graphical user interface control panels for mobile phone. A user utilizes a communication device to communicate with wireless network by Bluetooth. A message sent from communication device is received by wireless that actuates from motion sensor.

- [9] Ponnekanti, S.R., Lee, B., Fox, A., Hanrahan, P., Winograd, T., 2001. ICrafter: A Service Framework for Ubiquitous Computing Environments, UBIComp, Atlanta, Georgia, pp. 56–75
- [10] Rekimoto, J., 1998. A multiple device approach for supporting whiteboard-based interactions. Human Factors in Computing Systems, Proceedings SIGCHI'98, Los Angeles, CA, April, pp. 344–351
- [11] Rekimoto, J., Ayatsuka, Y., Kohno, M., 2003. SyncTap: an interaction technique for mobile networking. Mobile HCI. Springer, Berlin, pp. 104–115
- [12] RIMRoad News, 2003. Smartphones to Overtake Handhelds This Year, <http://www.rimroad.com/articles/2003/3/2003-3-27-Smartphones-to-Overtake.html>
- [13] Rosenfeld, R., Olsen, D., Rudnicky, A., 2001. Universal speech interfaces. ACM Interactions VIII(6), 34–44
- [14] Schilit, B.N., Adams, N.I., Want, R., 1994. Context-aware computing applications. IEEE Workshop on Mobile Computing Systems and Applications, Santa Cruz, CA. IEEE Computer Society, pp. 85–90
- [15] Shih, E., Bahl, P., Sinclair, M.J., 2002. Wake on wireless: an event driven energy saving strategy for battery operated devices. MOBICOM'02: Eighth Annual ACM International Conference on Mobile Computing and Networking, Atlanta, GA, pp. 160–171
- [16] Wobbrock, J.O., Myers, B.A., Kembel, J., 2003. EdgeWrite: a high-accuracy stylus text entry method. CHI Letters: ACM Symposium on User Interface Software and Technology, UIST'03, Vancouver, British Columbia, Canada, November 2–5, pp. 61–70, <http://www.cs.cmu.edu/~jrock/pubs/uist-03.pdf>
- [17] Zimmermann, G., Vanderheiden, G., Gilman, A., 2002. Prototype implementations for a universal remote console specification. CHI'2002, Minneapolis, MN, pp. 510–511